


ROCK SOLID

# PhotoBooth Kit for Stands and Tripods

## SETUP INSTRUCTIONS FOR A STAND

- ❶ If you have wheels on your stand, lock them in place to prevent it from rolling. Adjust the height of the stand to the desired position for the monitor.
- ❷ Place the Rock Solid Aero Elbow on the top of the stand and articulate the elbow to 90°.
- ❸ Mount the Rock Solid VESA Local Monitor Mount to the monitor.
- ❹ Slide the Rock Solid VESA Local Monitor Mount onto the Rock Solid Aero Elbow and tighten the thumb screw on the Rock Solid VESA Local Monitor Mount.
- ❺ Position the monitor so the back leg is perpendicular to the monitor by rotating the Rock Solid Aero Elbow on the stand. When in the desired position, tighten the thumb screw.
- ❻ Attach the Rock Solid Master Clamp to the upper section of the stand.
- ❼ Attach the Rock Solid Master Articulating Arm to the Rock Solid Master Clamp.
- ❽ Attach the Camera Platform to the top of the Rock Solid Master Articulating Arm.
- ❾ Attach the camera to the Camera Platform.
- ❿ While holding the camera, loosen the Rock Solid Master Articulating Arm knob. The arm and platform will become slack. Position the camera over the monitor with one hand and tighten the knob with the other.

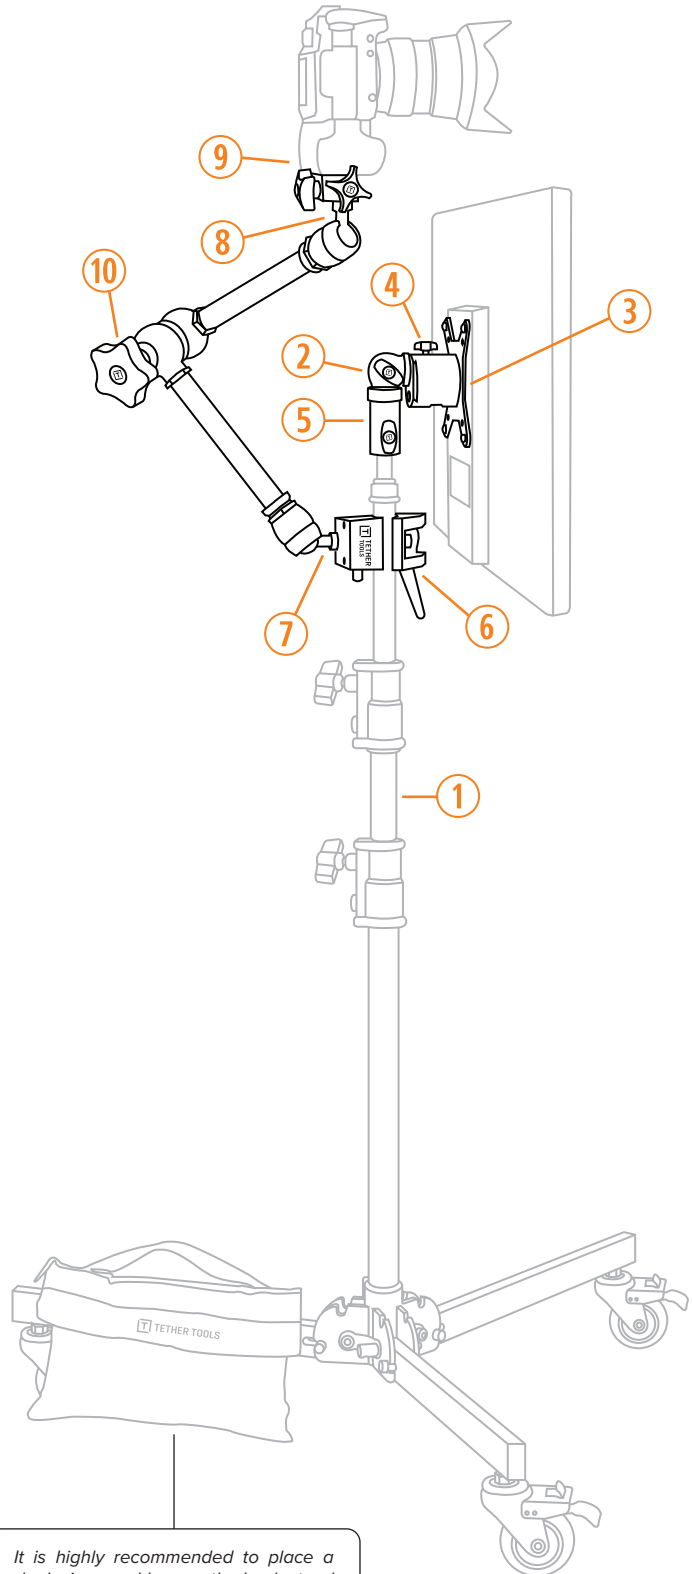

ROCK SOLID

# PhotoBooth Kit for Stands and Tripods

## SETUP INSTRUCTIONS FOR A TRIPOD

- 1 Adjust the height of the tripod to the desired position for the monitor. Make sure to extend the center column at least the width of the Rock Solid Master Clamp.
- 2 Mount the Rock Solid VESA Local Monitor Mount to the monitor.
- 3 Using either the Arca-swiss mount on the Rock Solid VESA Local Monitor Mount or by attaching your ballhead plate to the Rock Solid VESA Local Monitor Mount, mount the monitor on the tripod.
- 4 Attach the Rock Solid Master Clamp to the center column of the tripod.
- 5 Attach the Rock Solid Master Articulating Arm to the Rock Solid Master Clamp.
- 6 Attach the Camera Platform to the top of the Rock Solid Master Articulating Arm.
- 7 Attach your camera to the Camera Platform.
- 8 While holding the camera, loosen the Rock Solid Master Articulating Arm knob. The arm and platform will become slack. Position the camera over the monitor with one hand and tighten the knob with the other.

